

## SPECIFICATIONS KOZ B-TOOL

**Application :** KOZ B-tool is the tool to assemble KOZ cable cleats on a straight or round pole, without damaging these (by drilling, sawing etc.). The KOZ B-tools are universal and can be used for all types of KOZ cable cleats. The B-tools can also be used to assemble other products on straight or round poles.

**Material :** Polyamide, fiberglass-reinforced, black, resistance to UV rays, salt water, ozone, oils, fuels, alkalis and radioactive rays, halogen free, fully recyclable.

**Flame resistance :** UL94 V-0 and classification following DIN 5510-2:2009 with flammability class S3, smoke SR2 and dripping ST-2.

**Flexure strength :** 210 N/mm<sup>2</sup>

**Tensile strength :** 120 N/mm<sup>2</sup>

**Thermal expansion :** 0,01% per 10° C temperature increase.




**Temperature limits :** Permanent application from -50° C to +120°. Brief heating up to 220°.

**Range of sizes :** There are 2 types:

*B-tools S, is suitable for:*  
 KOZ ST 13-26, 26-38, 36-52, 50-75  
 KOZ TRI eco 24-35, 33-46  
 KOZ UNI 3x13-32, 4x13-32, 3x30-47, 4x30-47

*B-tool L, is suitable for:*  
 KOZ ST 75-100, 100-130  
 KOZ TRI 25-40, 38-53, 53-66, 67-82, 82-90

**Fitting :** B-tools can be assembled by using a steel tie. You can turn the B-tool inside or outside, depending the diameter of the pole, as shown on the pictures.

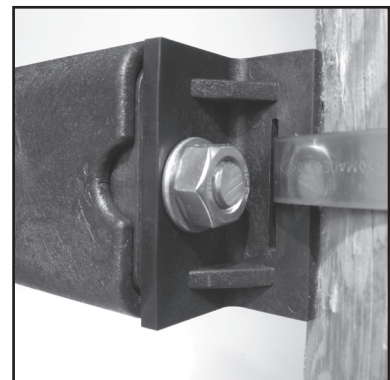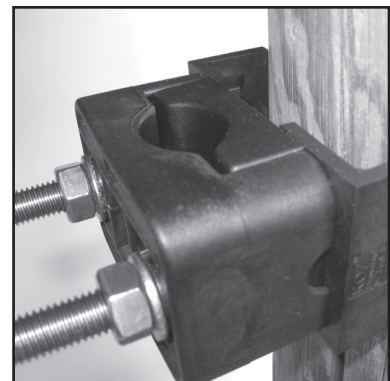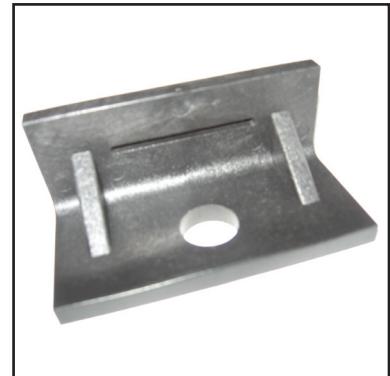

Dimensions in millimetres

Type	L	B	I	D	S	H
<b>B-tool S</b>	60	35	12,5	5	26-2	32
<b>B-tool L</b>	80	42	14,5	6	40-2	34

This design is registered.  
 All rights are reserved to KOZ Products b.v.

No rights may be derived from the indicated sizes, as the products re subject to ongoing development. KOZ therefore reserves the right to implement these changes without notice. For the most up-to-date information, see our Internet site: [www.kozproducts.com](http://www.kozproducts.com)

